

Version:  
July 18, 2018

# **DIRECT**

## **Electronics Tech.**

# **(FMF) Power Metal Film Flame-Proof Resistors**

Web: [www.direct-token.com](http://www.direct-token.com)

Email: [rfq@direct-token.com](mailto:rfq@direct-token.com)

**Direct Electronics Industry Co., Ltd.**

**China:** 12F, Zhong Xing Industry Bld., Chuang Ye Road,  
Nan Shan District, Shen Zhen City,  
Guang Dong, China 518054  
Tel: +86 755 26055363; Fax: +86 755 26055365

**Taiwan:** No.137, Sec. 1, Zhongxing Rd., Wugu District,  
New Taipei City, Taiwan, R.O.C. 24872  
Tel: +886 2981 0109 Fax: +886 2988 7487

## ▶ Product Introduction

### Flame Proof Resistor (FMF), low TCR, low noise and high precision for telecommunication, consumer products.

#### Features :

- High power in small packages, Low electrical noise.
- Outstanding stability under a wide range of electrical and environmental stresses.
- Pure tin plating provides compatibility with lead (Pb)-free and lead containing soldering processes.
- Compatible with "Restriction of the use of Hazardous Substances" (RoHS) directive 2011/65/EU.

#### Applications :

- Ballasts, Amplifiers, Power Supplies, Telecommunications
- Household Appliances, Automotive, Computer, Precision Controls
- Test Equipment and Instrumentation, Medical Equipment, Security Monitoring

Direct Electronics is a global engineering electronics supplier for performance-critical applications, introducing the (FMF) series of Power Metal Film Flame-Proof Resistors. Offering a combination of high precision and handling high power conditions, this resistor is ideal for measuring power line voltage for power condition and energy metering monitoring.

Direct (FMF) Flame-Proof Resistor is designed to provide an alternative options between Power Metal Oxide Resistors (RSS, RSN) and Precision Metal-Film Resistors (MF). The (FMF) takes the power handling with flame-proof advantage of metal oxide resistors and inherits the precision tolerance of (MF) metal film resistors to provide a solution for customers looking for an industrial grade flame-proof resistors.

The power of Flame-Proof Resistor (FMF) is rated at 1/4, 1/2WS, 1/2W, 1W, 2WS, 2W, 3WS, 3W, 5WS, 5W, and 7WS respectively. Standard values from 0.1Ω to 10MΩ are available, E24, E-96, and E-192 nominal standard series provides adequate "close value match" choice for designers. Maximum overload voltage specifies up to 1000V at 5W normal size or 7WS minimum size.

The (FMF) resistors have excellent high power characteristics to improve reliability and reduce faults. With precision levels of ±0.1% resistance tolerance and ±15ppm/°C TCR they free up designers' error budgets, enabling savings elsewhere in the circuit. Accuracy is ± 0.1%, ± 0.25%, ± 0.5%, ± 1%, ± 2%, and ± 5% precision tolerance, which saves the designer's error budget and free up other parts of the circuit.


Structurally the resistors include a homogeneous sputtered metal alloy film on a high-aluminum ceramic rod and protect with flame-proof coating. The resistance value in the film was adjusted to the final value by laser spiral cutting. The terminals on both ends of the resistor are covered with a pure tin coating to avoid aging the contacts and a low melting point solder can be used thereon. Contact us with your specific needs. For more information, please link to Direct official website "[General Purpose Resistors](#)".



**► Dimensions & Specifications**

**Specifications & Dimensions (Unit: mm) (FMF)**

Style FMF		Dimensions (Unit: mm)				Operating Temp. Range (°C)	Max Working Voltage (V)		Max Overload Voltage (V)	
Normal	Mini	L	D	H	d ± 0.1		Normal	Mini	Normal	Mini
1/4W	1/2WS	6.3±0.5	2.3±0.3	28±2.0	0.55	-55 ~ +155	300	200	500	400
1/2W	1WS	9.0±1.0	3.2±0.5	26±3.0	0.65		350	250	600	500
1W	2WS	11.5±1.0	4.5 ±0.5	33 ±3.0	0.78		350	300	700	600
2W	3WS	15.5±1.0	5.0±0.5	32±3.0	0.78		350	350	700	700
3W	5WS	17.5±1.0	6.5±0.5	35±3.0	0.78		500	350	1000	700
5W	7WS	24.5±1.0	8.5±0.5	35±3.0	0.78		600	500	1000	800

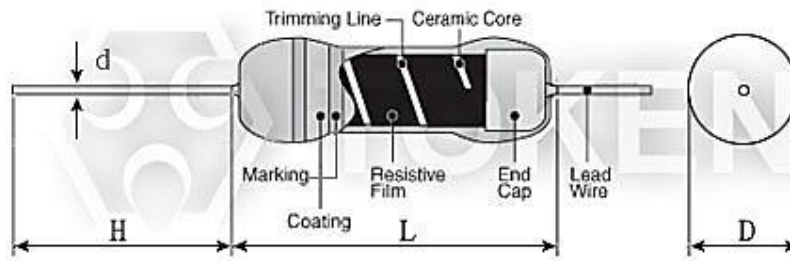

Specifications & Dimensions (Unit: mm) (FMF)

- Remark:**  
 The maximum value of D.C. voltage or A.C. voltage (commercial frequency effective value) capable of being applied continuously to resistors at the rated ambient temperature. Rated voltage shall be calculated from the following formula. However, it shall not exceed the maximum working voltage.  
 Rated Voltage (RCWV) =  $\sqrt{\text{Rated Power (W)} \times \text{Nominal Resistance Value } (\Omega)}$



## ► Resistance & TCR

### Resistance & TCR Range (FMF)

Style		Tolerance(%)	TCR (ppm/°C) / Ω				
Normal	Mini		±15	±25	±50	±100	±200
1/4W	1/2WS	±5%					0.1Ω~10MΩ
		±2%					0.1Ω~10MΩ
		±1%	10Ω~1MΩ	10Ω~10MΩ	10Ω~10M	0.1Ω~10MΩ	0.1Ω~10MΩ
		±0.5%	10Ω~1MΩ	10Ω~10MΩ	10Ω~10M	0.1Ω~10MΩ	
		±0.25%	10Ω~1MΩ	10Ω~1MΩ	10Ω~1MΩ	0.1Ω~1MΩ	
		±0.1%	10Ω~1MΩ	10Ω~1MΩ	10Ω~1MΩ		
1/2W	1WS	±5%					0.1Ω~10MΩ
		±2%					0.1Ω~10MΩ
		±1%		10Ω~1MΩ	10Ω~10MΩ	0.1Ω~10MΩ	0.1Ω~10MΩ
		±0.5%		10Ω~1MΩ	10Ω~10MΩ	0.1Ω~10MΩ	
		±0.25%		10Ω~1MΩ	10Ω~1MΩ	0.1Ω~1MΩ	
		±0.1%		10Ω~1MΩ	10Ω~1MΩ		
1W	2WS	±5%					0.1Ω~10M
		±2%					0.1Ω~10M
		±1%		10Ω~1MΩ	10Ω~10MΩ	0.1Ω~10MΩ	0.1Ω~10M
		±0.5%		10Ω~1MΩ	10Ω~10MΩ	0.1Ω~10MΩ	
		±0.25%		10Ω~1MΩ	10Ω~1MΩ	0.1Ω~1MΩ	
		±0.1%		10Ω~1MΩ	10Ω~1MΩ		
2W	3WS	±5%					0.1Ω~10MΩ
		±2%					0.1Ω~10MΩ
		±1%		10Ω~1MΩ	10Ω~10MΩ	0.1Ω~10MΩ	0.1Ω~10MΩ
		±0.5%		10Ω~1MΩ	10Ω~10MΩ	0.1Ω~10MΩ	
		±0.25%		10Ω~1MΩ	10Ω~1MΩ	0.1Ω~1MΩ	
		±0.1%		10Ω~1MΩ	10Ω~1MΩ		
3W	5WS	±5%					0.1Ω~10MΩ
		±2%					0.1Ω~10MΩ
		±1%				0.1Ω~100KΩ	0.1Ω~10MΩ
		±0.5%				10Ω~100KΩ	
5W	7WS	±5%					0.1Ω~100KΩ
		±2%					0.1Ω~100KΩ
		±1%				0.1Ω~100KΩ	0.1Ω~100KΩ
		±0.5%				10Ω~100KΩ	

\* Resistance standard decade values E-24, E-96, E-192.



## ► Electrical Performance


### Electrical Performance (FMF)

Test Characteristics	Test Methods	Performance Requirement
<b>Resistance</b>	Measuring points at 10mm±1mm from the end cap.	Within regulated tolerance
<b>T.C.R.</b>	Room temperature /100°C up.	± 15, ± 25, ± 50, ± 100, ± 200ppm/ °C
<b>Short Time Overload</b>	Rated voltageX2.5 or Max. overload voltage for 5s whichever less.	±(2%+0.1Ω)
<b>Solderability</b>	260°C±5°C, 2s±0.5s	90% Coverage Min.
<b>Terminal strength</b>	Direct load: 25N, 10s Twist test:360°, 5 times Bending test:5N, 90°, 2 times	No mechanical damages
<b>Moisture resistance</b>	40°C±2°C, 90%~95%RH, 1000Hrs, 1.5Hrs on/0.5Hr off cycle	±(5%+0.1Ω)
<b>Load Life</b>	70°C±2°C, 1000Hrs, 1.5Hr on/0.5Hr off cycle.	±(5%+0.1Ω)




► **Derating Curve & Temperature**

**Hot-Spot Temperature (FMF)**

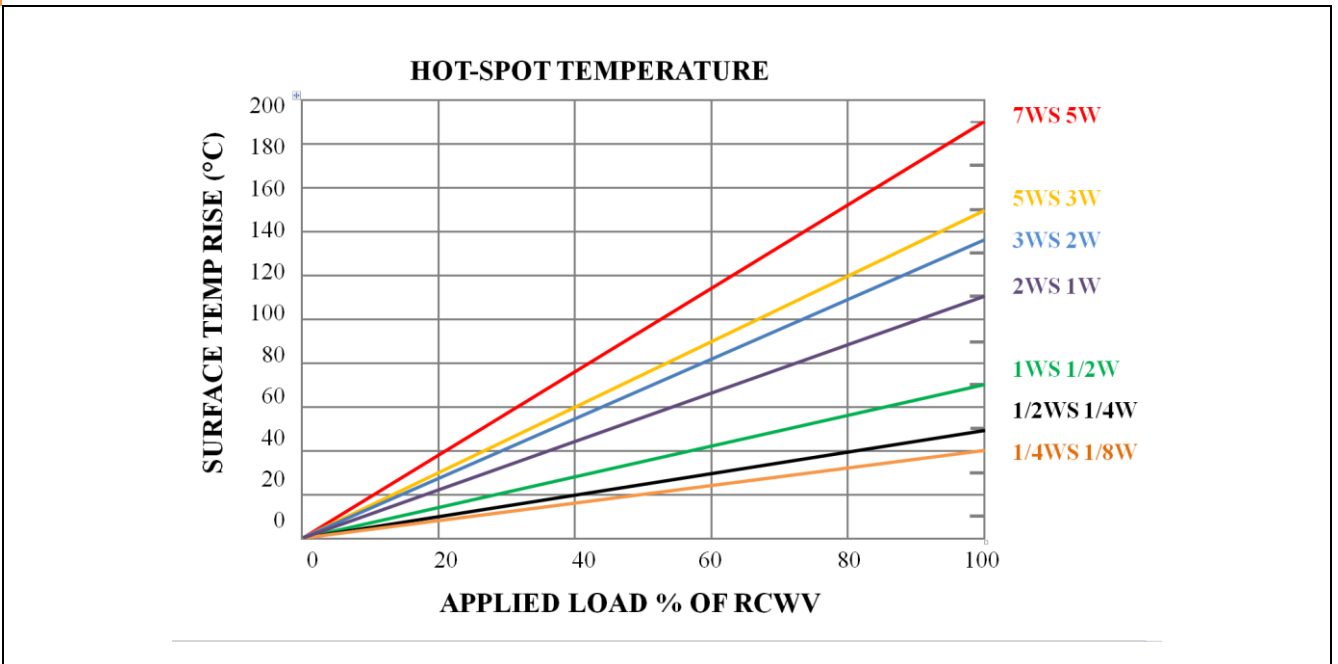

**Derating Curve (FMF)**

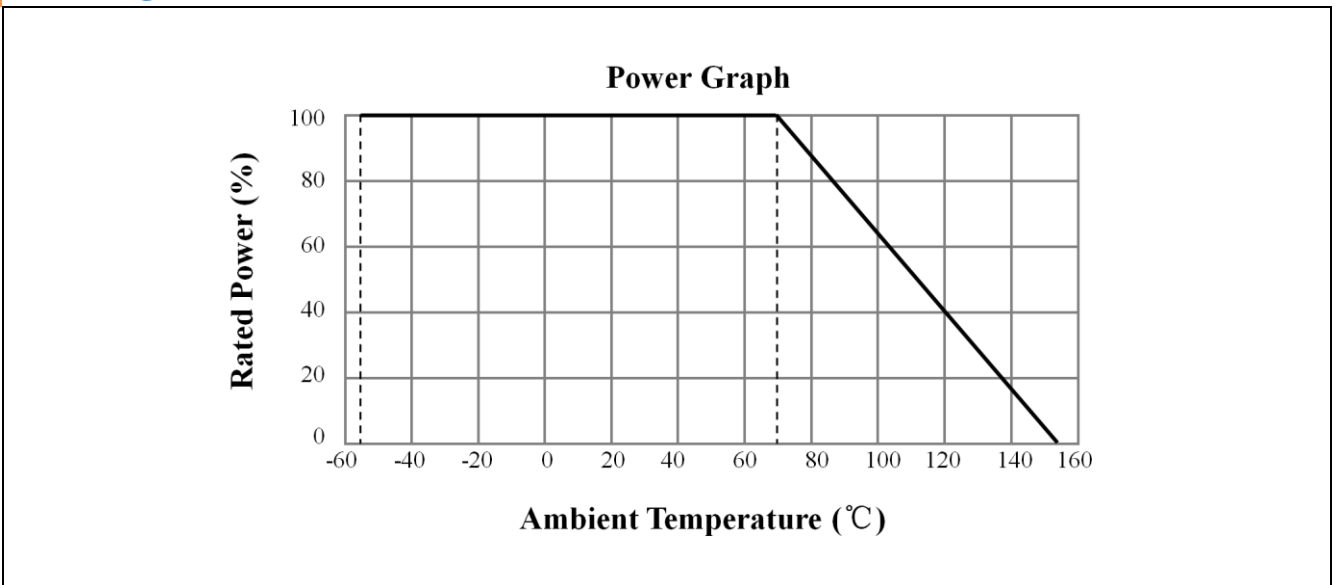

▶ **Order Codes**

**Order Codes (MF)**

FMF	-	1/2W	100R		J			T52
Part Number		Rated Power (W)	Resistance Value (Ω)		Resistance Tolerance (%)		TCR(ppm/°C)	Package
FMF		1/4W	10R	10Ω	J	±5%	±200ppm/°C	T52 Taping 52mm/Box.
		1/2WS	100R	100Ω	G	±2%	C1 ±100ppm/°C	T73 Taping 73mm/Box.
		1/2W	1K	1KΩ	F	±1%	C2 ±50ppm/°C	T88 Taping 88mm/Box.
		1W	10K	10KΩ	D	±0.5%	C3 ±25ppm/°C	
		2WS					C5 ±15ppm/°C	
		2W						
		3WS						
		3W						
		5WS						
		5W						
		7WS						

## ► General Information

### General Purpose Resistors with Customized Service

Direct Electronics is expanding business to include a broad range of General Purpose Resistor products designed for high volume applications. This expanded range of commercial resistor presents a more comprehensive product offering for Customer Experience Management (CEM) and other high volume customers that require quality products at competitive pricing.

Backed by the same customer service, technical support and quality assurance that Direct has always provided, these new commercial products enable you the opportunity to source a wider range of resistors from a trusted supplier.

### General Use

When an ambient temperature exceeds a rated ambient temperature, resistor shall be applied on the derating curve by derating the load power. General purpose resistor under overloads is not combustion resistant and is likely to emit, flame, gas, smoke, red heat, etc. Flame retardant resistor generally emits smoke and red heat in a certain power and over but do not emit fire or flame.

When resistors are shielded or coated with resin etc., stress from the storage heat and the resins are applied. So, performance and reliability should be checked well before use.

When a voltage higher than rated is applied in a short time (single pulse, repeated pulses, surge, etc.), it does not necessarily ensure safety that an effective wattage is not higher than a rated wattage. Then consult with us with your specified pulse wave shape. Resistors shall be used in a condition causing no dew condensation.

Keep temperature from rising by choosing resistor with a higher rated capacity; do not use a component having the exact load value required. For considerations of safety in extended period applications, the rating should be more than four times higher than the actual wattage involved, but never use resistors at less than 25% of its rated power.

In applications where resistors are subject to intermittent current surges and spikes, be sure in advance that the components selected are capable of withstanding brief durations of increased load.

Do not exceed the recommended rated load. Resistor must use within the rated voltage range to prevent the shortening of service life and/or failure of the wound resistance elements.

Minimum load: Resistor must be utilized at 1/10 or more of the rated voltage to prevent poor conductance due to oxidation build-up. For basic particulars for cautions, refer to EIAJ Technical Report RCR-2121 "Guidance for care note on fixed-resistors".

